

## Jensolin White Primer

Jensolin White Primer, a specially formulated solvent based undercoat for wood and masonry surfaces hides every surface stain, discoloration and mark. Glossy, Semi-glossy and Flat oil finishes can be applied directly onto the surface, coated with this primer.

### PRODUCT BENEFITS




- Alkali Resistant
- Excellent Sealing Property
- Excellent Coverage
- Quick Drying
- Excellent Top coat Holding
- Suitable for Interior and Exterior Surfaces



### PRODUCT FEATURES

#### AVAILABLE PACK SIZES

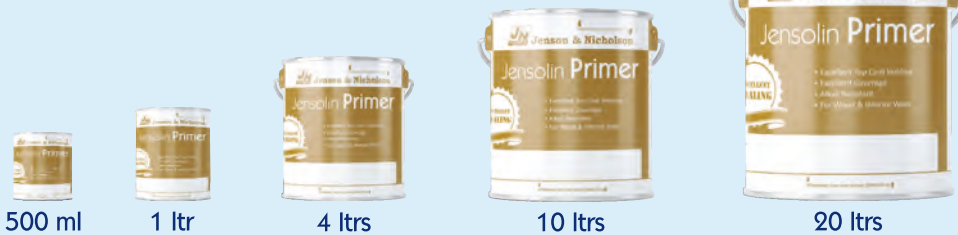

500 ml

1 Ltr

4 Ltrs

10 Ltrs

20 Ltrs

#### COVERAGE



110-130\* sq. ft. / litre for one coat finish under normal conditions

\*Actual coverage may vary due to factors such as method and condition of application, surface roughness and porosity and weather conditions.

### RECOMMENDED USE

Jensolin White Primer is recommended for use on interior wooden surfaces and alkaline surfaces like cement plaster, cement concrete, bricks, etc.



### SURFACE DRYING TIME



#### Technical Data:

Colour	:	White
Gloss / Sheen	:	Matt
Recommended Dilution	:	Brush 10 - 20% and Spray 30 - 40% by volume with recommended Thinner
Surface Dry time	:	1 hour* (25°C / 50% RH)
Over coating period	:	6 - 8 hrs* (25°C / 50% RH)
Stability of thinned paint	:	Use within 24 hours

\*Recoat and drying period may vary under different conditions



## HOW TO PREPARE (SURFACE / WALL)

### Cleaning:

- Ensure that the surface is free from grease, dust, rust and moisture.
- Sand the surface using Emery Paper 180 to remove loosely bound particles, rust, grease, peeling or flaking paint, etc.
- Wipe the surface clean.



### HOW TO APPLY ?

#### Primer - 1st Coat:

Apply a coat of Jenson White Primer directly by brush, after diluting it with thinner at a recommended ratio. Let it dry for 6-8 hrs. Sand using Emery Paper 180 and wipe the surface clean.

#### Putty (Optional):

Fill up minor dents, cracks and undulations with thin coats of JN Acrylic putty on walls or Synthetic Putty on wooden surfaces. Allow drying time for 4-6 hours. Smoothen with Emery Paper 180 and wipe the surface clean.

#### Primer - 2nd Coat:

Apply another coat of Jenson White Primer by diluting it with thinner. Let it dry for 6-8 hrs. Sand with Emery Paper 320 or 400 lightly and wipe the surface clean.

### Application precautions:

- Paint only when the ambient temperature is between 10° C and 45° C
- Stir the paint properly, before use.
- Do not over thin the primer above the recommended level or over-extend the brush.

### For product related queries, feedback and quality complaints, Please contact:

Customer care: +91 8300 03 05 05

E-mail: [ccc@jnpl.in](mailto:ccc@jnpl.in),

Visit us: [www.jnpl.in](http://www.jnpl.in)

Regd. Office: Jenson & Nicholson Paints Private Ltd.

Old No. 109B, New No. 124, Developed Plots, SIDCO Industrial Estate, Ambattur, Chennai - 600 098. Tamil Nadu, INDIA.

All information mentioned in this data sheet are based on tests conducted in laboratory conditions. Results may vary depending upon atmospheric conditions, application methodologies and substrates. We reserve the right to alter the given data without notice.

Ver:2.0 / TDS / 2020



WOOD COATINGS

### Storage and Transportation:

- Store the containers at constant temperatures, away from direct sunlight /elevated temperatures.
- Keep the product in frost-free environment.
- Store the containers in upright position to avoid leakage or damage.
- Do not pour the waste paint in drains or other water sources.

### Shelf Life:

2 years from the date of manufacture in the original tightly closed containers, stored away from direct sunlight and excessive heat.

### Pack Size:

Available in 500ml, 1L, 4L, 10L and 20L packs.

### WHAT ARE THE PRECAUTIONS ?

- Keep containers upright, tightly closed in a cool, dry, well ventilated place.
- Ensure opened containers are tightly closed, when not in use.
- Store away from excessive heat, direct sunlight and other flammable materials.
- Highly Flammable product so, store in place away from heat and sparks and No smoking to be allowed near the product.
- Keep out of reach of children and pets.
- Do not store near food, drinks or animal feed.
- Do not mix with incompatible materials.
- Use personal protective equipment like goggles, face masks and gloves.
- Ensure good ventilation during application and drying.
- Do not inhale the vapour or spray.
- In case of contact with eyes or skin, wash immediately using plenty of water. Seek medical advice, if irritation persists.
- In case of ingestion, seek immediate medical attention and do not induce vomiting.
- Do not dispose any spilled or unused paint in drain, water bodies and landfill.
- Dispose spillages or unused paint and containers, through appropriate disposal agency.